

JACK STANDS



JS1228




JS1224



JS1218



US1175

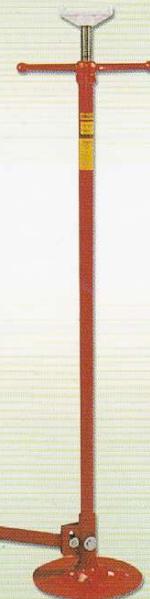

US1180



TS1102



JS303



JS603



JS302



JS602

MODEL JS1218/JS1224/JS1228

These models are designed for using with trucks, and which equipped with threaded stud for height adjustment and the ball bearing for easy raising under the load.

MODEL JS302/JS602

These models are designed with integral lock ratchet and saddle column in higher strength and better utility.

MODEL JS303/JS603

Same as Model JS302 & 602, but these models are newly designed with rubber pads which can prevent the auto body from damage.

MODEL US1175/US1180

- 1 Light weight, slender design makes handling easily, even in closed quarter.
- 2 Quick adjusting spin handle with thrust bearing eliminates wear and provides turning with ease under loading.

MODEL TS1102

- 1 This model is designed for supporting vehicle components under the vehicle.
- 2 Pin positions provide four different height adjustments.

MODEL	CAPACITY	HEIGHT RANG(mm)	BASE SIZE (mm)	QTY / CARTON	N.W.(KG)	G.W.(KG)	CUFT
JS1218	12 TON	456 ~ 710	Φ 467	1 PC	18.5	19.5	0.7'
JS1224	12 TON	614 ~ 868	Φ 590	1 PC	21	22	1'
JS1228	12 TON	710 ~ 1065	Φ 670	1 PC	25	26	1'
JS302	3 TON	270 ~ 420	177 X 194	1 PAIR	6	6.6	0.66'
JS303	3 TON	290 ~ 440	177 X 194	1 PAIR	6.6	7.2	0.66'
JS602	6 TON	320 ~ 480	203 X 229	1 PAIR	10.7	11.3	0.9'
JS603	6 TON	340 ~ 505	203 X 229	1 PAIR	11	11.6	0.9'
TS1102	2 TON	1405 ~ 2165	Φ 704	1 PC	17.5	19	0.8'
US1175	3/4 TON	1400 ~ 2065	Φ 305	1 PC	13.5	15	1.1'
US1180	3/4 TON	1400 ~ 2065	Φ 305	1 PC	15.3	16.8	1.1'